







Tadano GT-600EL

60 Tonne

TADANO GT-600EL

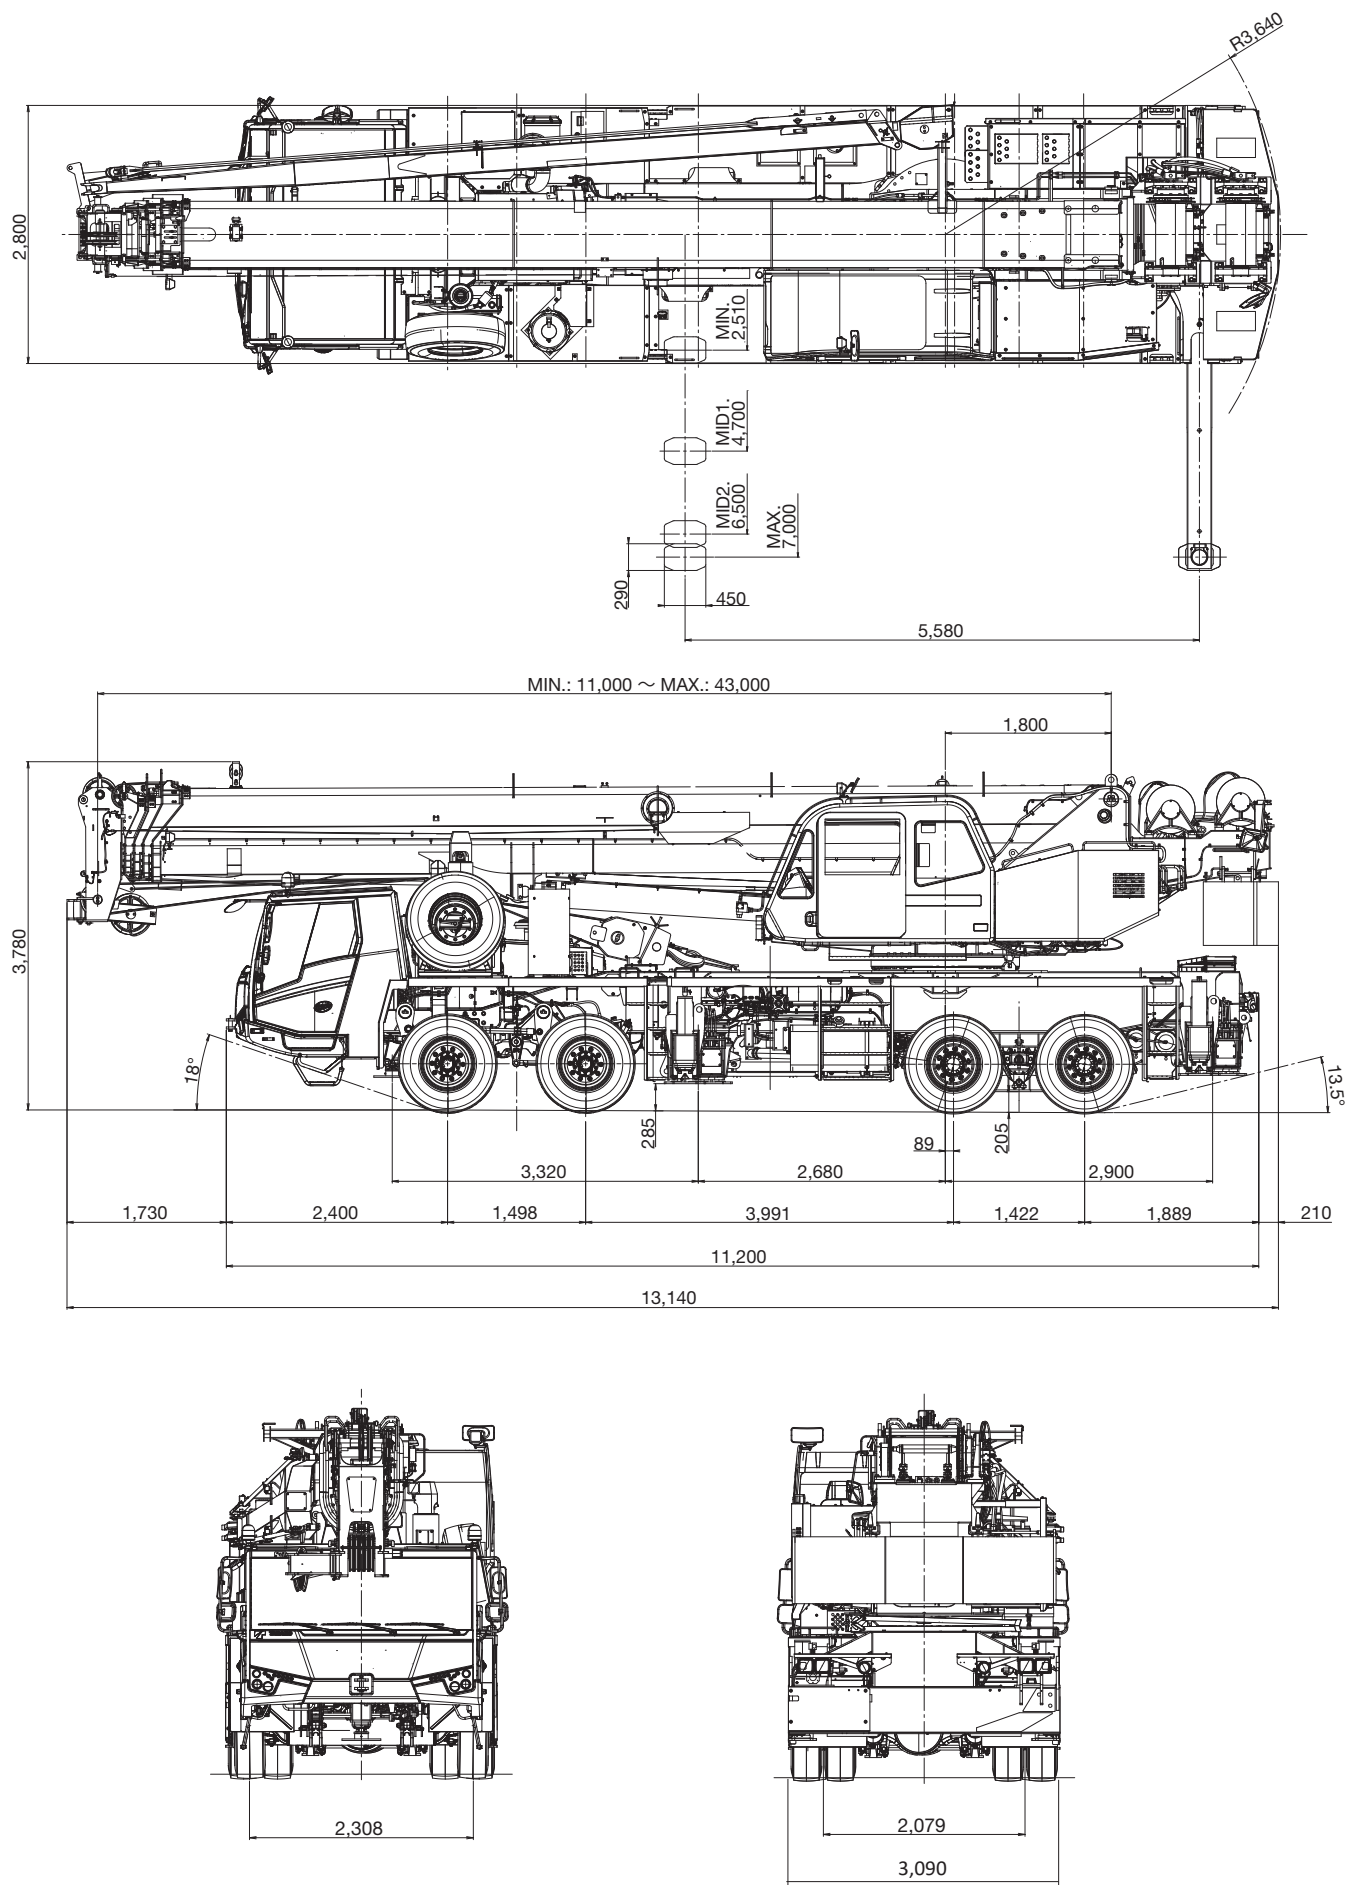

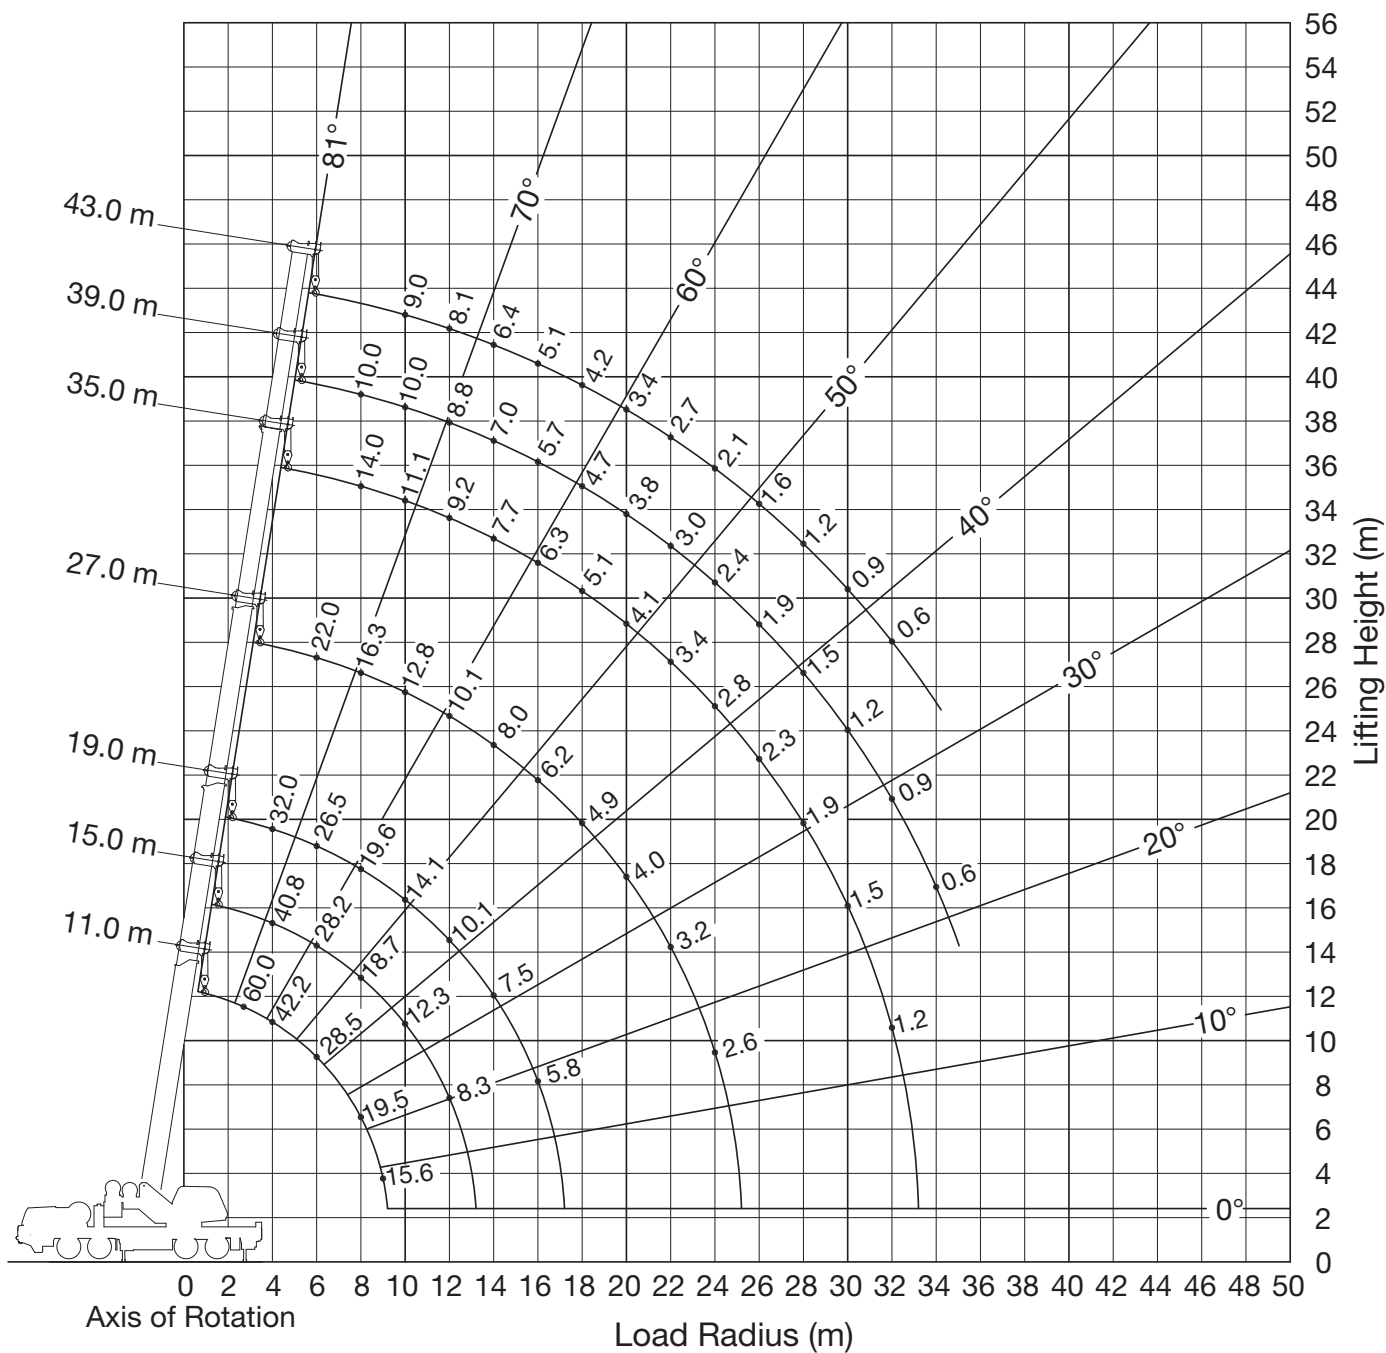

Type	Possible Load	Weight	H
5 Sheave	60t	430kg	2.0m
Ball Hook	4.5t	100kg	2.1m



MCINTOSH
CRANES

Tadano GT-600EL
60 Tonne



11.0 - 43.00m



7.0m

360°

Main Boom (m)

Radius	11.0	15.0	19.0	27.0	35.0	39.0	43.0	Radius
3.0	55.0	40.8	32.0					3.0
3.5	47.3	40.8	32.0					3.5
4.0	42.2	40.8	32.0					4.0
4.5	37.8	37.6	32.0					4.5
5.0	34.2	33.9	32.0	22.0				5.0
5.5	31.1	30.9	30.3	22.0				5.5
6.0	28.5	28.2	26.5	22.0				6.0
6.5	26.2	25.9	23.5	21.7				6.5
7.0	24.3	23.0	22.0	19.6	14.0			7.0
7.5	22.1	20.7	21.4	17.9	14.0			7.5
8.0	19.5	18.7	19.6	16.3	14.0	10.0		8.0
9.0	15.6	15.1	16.5	14.0	12.9	10.0	9.0	9.0
10		12.3	14.1	12.8	11.1	10.0	9.0	10
11		10.0	11.9	11.5	10.0	10.0	9.0	11
12		8.3	10.1	10.1	9.2	8.8	8.1	12
14			7.5	8.0	7.7	7.0	6.4	14
16			5.8	6.2	6.3	5.7	5.1	16
18				4.9	5.1	4.7	4.2	18
20				4.0	4.1	3.8	3.4	20
22				3.2	3.4	3.0	2.7	22
24				2.6	2.8	2.4	2.1	24
26					2.3	1.9	1.6	26
28					1.9	1.5	1.2	28
30					1.5	1.2	0.9	30
32					1.2	0.9	0.6	32
34						0.6		34

TADANO GT-600EL



Tadano GT-600EL
60 Tonne



52 - 57.3m



9.0 - 14.3m



7.0m



360°

43 m Boom + 9 m Jib

43 m Boom + 14.3 m Jib

Jib Offset (Degrees)

Radius	5	25	45	5	25	45	Radius
12	4.0						12
14	3.6			2.4			14
16	3.4	3.0		2.3			16
18	3.1	2.8	1.7	2.1	1.6		18
20	2.9	2.6	1.6	2.0	1.5		20
22	2.7	2.5	1.6	1.9	1.4	1.0	22
24	2.2	2.3	1.5	1.8	1.4	0.9	24
26	1.7	2.0	1.5	1.7	1.3	0.9	26
28	1.3	1.6	1.5	1.6	1.2	0.9	28
30	1.0	1.3	1.4	1.3	1.2	0.8	30
32	0.7	0.9	1.1	1.0	1.2	0.8	32
34	0.5	0.7	0.8	0.8	1.1	0.8	34
36		0.4	0.6	0.6	0.9	0.8	36
38				0.4	0.6	0.8	38
40					0.4	0.5	40

TADANO GT-600EL